


## IVG OIL AUSTRALIA

## RODA

### Australia

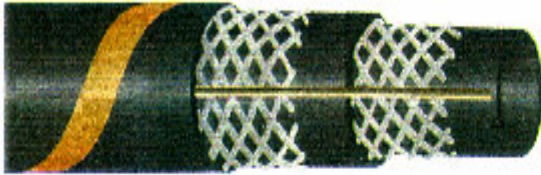

Medium duty mandrel built delivery hose, for the transfer of petroleum based products with up to 30% aromatic content.

Not recommended for ULP transfer.

**Tube:** Black smooth nitrile rubber.

**Cover:** Black smooth chloroprene rubber.

**Reinforcing:** Plies of synthetic cord.

**Temperature:** -15 to +70 degrees Celsius.

**Markings:** IVG "oil" red stripe, 10 bar W.P.

I.D. (mm)	O.D. (mm)	W.P. (psi)	B.P. (psi)	Weight (kg/mt)	Coil Lth (mt)
13.0	20.0	150	450	0.24	20
19.0	27.0	150	450	0.39	20, 60
25.0	36.0	150	450	0.52	20, 60
32.0	42.0	150	450	0.82	20, 120
38.0	48.0	150	450	0.94	20, 120
45.0	55.0	150	450	1.01	20
51.0	61.0	150	450	1.12	20, 60
58.0	70.0	150	450	1.60	20
63.5	74.0	150	450	1.46	20, 60
76.0	89.0	150	450	2.14	20, 60
90.0	105.0	150	450	2.87	20
102.0	115.0	150	450	2.97	20, 60
114.0	127.0	150	450	3.30	20
125.0	141.0	150	450	3.78	20
152.0	168.0	150	450	4.95	20

**PHONE (06) 876 2994**

**FAX (06) 876 7000** Specifications subject to change without notice