


IVG Malmo

Malmo

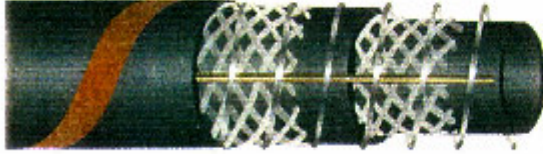

Tank truck suction and delivery hose, used for transfer of a wide range of petroleum based products with up to 30% aromatic content.

Not recommended for ULP transfer.

Tube: Black smooth nitrile rubber.

Cover: Black smooth chloroprene rubber.

Reinforcing: Plies of synthetic cord, steel wire helix.

Temperature: -15 to +70 degrees Celsius.

Markings: IVG "nil" red stripe, 10 bar W.P.

ROSM

I.D. (mm)	O.D. (mm)	W.P. (psi)	B.P. (psi)	Weight (kg/mt)	Coil Lth (mt)
19.0	30.0	150	450	0.67	20
25.0	35.0	150	450	0.86	20, 60
32.0	43.0	150	450	0.51	20, 60
38.0	49.5	150	450	1.35	20, 60
45.0	57.0	150	450	1.62	20
51.0	63.0	150	450	1.86	20, 60
58.0	71.0	150	450	2.08	20
63.5	78.0	150	450	2.31	20
76.0	89.0	150	450	3.01	20, 60
90.0	106.0	150	450	4.22	20
102.0	119.0	150	450	5.31	20, 60
114.0	133.0	150	450	6.24	20
125.0	145.0	150	450	7.52	20
152.0	175.0	150	450	11.46	20

PHONE (06) 876 2994

FAX (06) 876 2993

Specifications subject to change without notice